




HIGH PERFORMANCE DIGITAL IMAGING  
**made easy**

# MICROPUBLISHER 5.0 & 3.3 RTV – COOLED OR NON-COOLED

High-Resolution IEEE 1394 FireWire™ Digital CCD Color Camera with High-Speed Real-Time Viewing

The QImaging MicroPublisher with Real-Time Viewing (RTV) delivers unsurpassed interactivity and productivity by combining ultra-high-resolution images with video-like, full-field-of-view frame rates up to 30fps. Scanning, framing, and focusing have never been easier than with the MicroPublisher RTV. The 30-bit color digitization produces high-quality images of brightfield, darkfield, and fluorescence work. For demanding low-light applications, the MicroPublisher RTV Cooled camera minimizes thermal noise during long exposure times. With an IEEE 1394 FireWire™ digital interface, the MicroPublisher RTV is easy to install, requiring a single wire to connect the camera to a computer or laptop. The MicroPublisher RTV eliminates expenses, installation problems, and inconveniences associated with framegrabbers and external power supplies. All cameras ship with image-capture software. A large selection of specialty software applications is available from QImaging's software partners. A **Software Development Kit (SDK)** is available upon request for interfacing the MicroPublisher RTV with custom software.

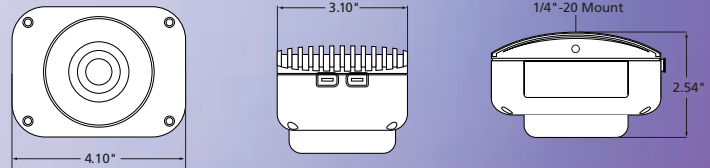

*Note: Microscope is shown for illustration only and is not included.*

## CAMERA MODELS

*Includes: IEEE 1394 FireWire™ cable, IEEE 1394 PCI card, QCapture software, QCapture Pro software, & access to SDK*

### MicroPublisher 5.0 RTV Cooled

Model: MP5.0-RTV-CLR-10-C  
CCD Digital Camera, Color,  
30 Bits with Peltier Cooling

### MicroPublisher 5.0 RTV Non-Cooled

Model: MP5.0-RTV-CLR-10  
CCD Digital Camera, Color, 30 Bits

### MicroPublisher 3.3 RTV Cooled

Model: MP3.3-RTV-CLR-10-C

### MicroPublisher 3.3 RTV Non-Cooled

Model: MP3.3-RTV-CLR-10

## FEATURES

High-Resolution,  
5- or 3.3-Million-Pixel Sensor

Real-Time Viewing (RTV)

Flexible Exposure Control  
from 1.6ms to 17.9min

Peltier Cooling

ROI (Region of Interest)

Binning

IEEE 1394 FireWire™

Extensive Third-Party  
Software Support

## BENEFITS

- Highly detailed, sharp images suitable for publication

- Previewing & focusing in real time
- 30fps (full field of view) with MicroPublisher 3.3 RTV
- 25fps (full field of view) with MicroPublisher 5.0 RTV

- Optimal integration over a wide range of light levels

- Minimizes thermal noise during low-light imaging

- Higher frame rates for previewing & focusing

- Increases sensitivity for quantitation & imaging of very low light levels
- Increases frame rate

- Simple connectivity
- Ease of use & installation
- Portability with laptop computer
- Simultaneous use of multiple cameras through a single port
- Single-cable operation (no external power supply or control unit)

- Choose from a large selection of life science & industrial software for microscopy, machine vision, & video-streaming applications



# MICROPUBLISHER 5.0 & 3.3 RTV SPECIFICATIONS

## APPLICATIONS

High-resolution still images for publication, documentation, and archiving in:

- Brightfield, Phase-Contrast, & Darkfield Microscopy
- Fluorescence Microscopy
- Pathology
- Histology
- Cytology
- Hematology
- Document Imaging
- Still-Image Animation

### CCD SENSOR

Light-Sensitive Pixels	MicroPublisher 5.0 RTV MicroPublisher 3.3 RTV	5 million real pixels; 2560 x 1920 3.3 million real pixels; 2048 x 1536
Binning Modes		2x2, 3x3, 4x4 in full color
ROI (Region of Interest)		From 1x1 pixels up to full resolution, continuously variable in single-pixel increments
Exposure/Integration Control		1.6ms to 17.9min in 1µs increments
Sensor Type	MicroPublisher 5.0 RTV MicroPublisher 3.3 RTV	Sony® ICX282 progressive-scan interline CCD (color) Sony® ICX252 progressive-scan interline CCD (color)
Pixel Size	MicroPublisher 5.0 RTV MicroPublisher 3.3 RTV	3.4µm x 3.4µm 3.45µm x 3.45µm
Cooling Available		Yes (optional)
Cooling Type		Peltier thermoelectric cooling to 10°C below ambient
Digital Output		10 bits
Readout Frequency		20, 10, 5, 2.5MHz
Frame Rate	MicroPublisher 3.3 RTV MicroPublisher 5.0 RTV	30fps full field of view (higher fps with ROI functions) 25fps full field of view (higher fps with ROI functions)

### CAMERA

Computer Platforms/Operating Systems		Windows® & Mac OS*
Digital Interface		IEEE 1394 FireWire™
Shutter Control		Electronic shutter, no moving parts
Trigger Types		Internal, Software
Optical Interface	MicroPublisher 5.0 RTV MicroPublisher 3.3 RTV	2/3", C-mount optical format 1/2", C-mount optical format
Threadmount		1/4" — 20 mount
Power Requirements		3.8W (non-cooled); 6.7W (cooled); 8-24V
Weight		710g
Warranty		2 years
Operating Environment		0 to 35°C (32 to 95°F)
Humidity		Less than 80% non-condensing at 35°C (95°F)

\*Refer to QImaging website for detailed listing of supported operating systems.  
Note: Specifications are nominal and subject to change.

FireWire and Mac OS are trademarks of Apple Computer, Inc., registered in the U.S. and other countries. Sony is a registered trademark of Sony Corporation. Windows is a registered trademark of Microsoft Corporation in the United States and other countries. Other brand and product names are the trademarks or registered trademarks of their respective owners and manufacturers.



**adept  
electronic solutions**  
The Machine Vision and Imaging Specialists  
Perth: +61 (08) 9242 5411  
Sydney: +61 (02) 9979 2599  
Melbourne: +61 (03) 9555 5621  
Email: adept@adept.net.au  
Web: http://www.adept.net.au




Tel 604.708.5061 ▪ Fax 604.539.1825 ▪ info@qimaging.com  
www.qimaging.com