

# Alvium

## G1-130 VSWIR



- IMX990 InGaAs sensor
- ALVIUM image processing
- GigE Vision
- 3 lens mount options

Model without hardware options

### Alvium G1 – Reliability designed for the future

Compact GigE camera for constant image quality

Alvium G1-130 VSWIR with Sony IMX990 runs 0.0 frames per second at 1.3 MP resolution.

Alvium G1 is the first GigE Vision camera powered by ALVIUM® Technology, Allied Vision's ASIC chip. It combines the advantages of the established GigE Vision standard with the flexibility of the Alvium platform. In addition to a comprehensive feature set and a broad sensor selection, it offers great versatility. With its very compact housing and industrial standard hardware, it can easily be integrated into any vision system while ensuring long-term availability and reliability.

Easy software integration with **Vimba X** and compatibility to the most popular third party image-processing libraries.



**SMARTER IMAGING FOR BETTER LIVES**

Perth: (08) 9242 5411 Melbourne: (03) 9384 1775 Sydney: (02) 9905 1551

Email: [sales@adeptturnkey.com.au](mailto:sales@adeptturnkey.com.au)

Web site: [www.adept.net.au](http://www.adept.net.au)

## Specifications

Interface	IEEE 802.3 1000BASE-T, IEEE 802.3af (PoE)
Resolution	1296 (H) × 1032 (V)
Spectral range	400 to 1700 nm
Sensor	Sony IMX990
Sensor type	InGaAs
Shutter mode	Global shutter
Sensor size	Type 1/2 VSWIR
Pixel size	5 μm × 5 μm
Lens mounts (available)	C-Mount, CS-Mount
Max. frame rate at full resolution	Tbd fps at 122 MByte/s, Mono8
ADC	12 Bit
Image buffer (RAM)	32 MByte
Non-volatile memory (Flash)	1024 KByte

### Output

Bit depth	8-bit, 10-bit, 12-bit; Adaptive (10-bit, 12-bit) Bit
Monochrome pixel formats	Mono8, Mono10, Mono10p, Mono12, Mono12p


### General purpose inputs/outputs (GPIOs)

TTL I/Os	2 GPIOs (LVTTTL)
Opto-isolated I/Os	1 input, 1 output

### Operating conditions/dimensions

Operating temperature	+5 °C to 55 °C (housing)
Power requirements (DC)	10.8 to 26.4 VDC AUX   IEEE 802.3af, Power Class 0 PoE
Power consumption	External power: 2.9 W at 12 VDC (typical)   Power over Ethernet: 3.2 W (typical)
Mass	65 g
Body dimensions (L × W × H in mm)	41 × 29 × 29

## Quantum efficiency

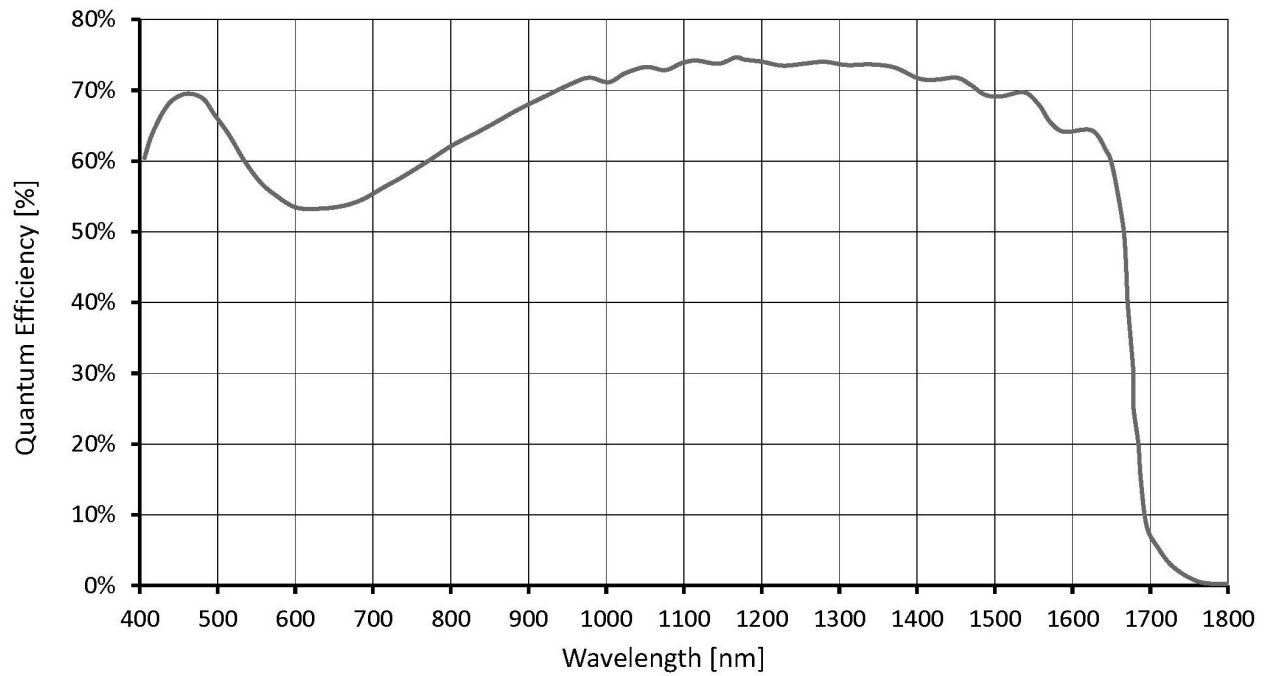

## Features

### Image control: Auto

- Auto exposure
- Auto gain

### Image control: Other

- Adaptive noise correction
- Binning
- Black level
- Contrast
- Custom convolution
- DPC (defect pixel correction)
- Gamma
- LUT (look-up table)
- Reverse X/Y
- ROI (region of interest)
- Sharpness/Blur

### Camera control

- Acquisition frame rate
- Bandwidth control
- Counters and timers
- Firmware update in the field
- I/O and trigger control
- Readout modes (SensorBitDepth)
- Sequencer
- Serial I/Os
- Temperature monitoring
- User sets

Technical drawing

