




HIGH PERFORMANCE DIGITAL IMAGING  
**made easy**

# QICAM *FAST1394*

High-Performance IEEE 1394 FireWire™ Digital CCD Camera – Monochrome or Color

The QImaging QICAM digital camera is designed for high-resolution, brightfield scientific and industrial applications. A progressive-scan interline CCD sensor gives a resolution of 1.4 million pixels in a 12-bit digital output. High-speed, low-noise electronics provide linear digital data at frame rates up to 110 fps with binning and ROI. The IEEE 1394 FireWire™ digital interface allows ease of use and installation with a single wire. No framegrabber or external power supply is required. The QICAM includes QCapture software (Windows® and Mac OS) for real-time image preview and capture. A **Software Development Kit (SDK)** is available upon request for interfacing with custom software.

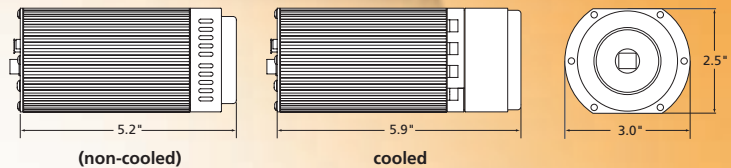

Note: Lenses are shown for illustration only and are not included.

## CAMERA MODELS

Includes: IEEE 1394 FireWire™ cable, IEEE 1394 PCI card, QCapture software, & access to SDK

- **Monochrome QICAM Cooled** Model: QIC-F-M-12-C
- **Monochrome QICAM Non-Cooled** Model: QIC-F-M-12 CCD Digital Camera, 12 Bits
- **Color QICAM Cooled** Model: QIC-F-CLR-12-C
- **Color QICAM Non-Cooled** Model: QIC-F-CLR-12 CCD Digital Camera, 12 Bits

## CAMERA OPTIONS

- **RGB Color Filter** for monochrome cameras (F-mount interface required), refer to spec sheet for more details



- **Extended Warranty**

## FEATURES

- High-Resolution, 1.4-Million-Pixel Sensor
- High-Speed Readout
- Flexible Exposure Control from 12µs to 17.9min
- 12-Bit Digitization/ 36-Bit Color Digitization
- External Sync & Trigger
- Peltier Cooling
- ROI (Region of Interest)

## BENEFITS

- Highly detailed, sharp images
- Previewing & focusing in real time
- 165fps maximum frame rate
- 110fps with 4x4 binning & ROI
- 10fps full resolution
- Ideal for automated imaging applications
- Optimal integration over a wide range of light levels
- 4096 grey levels for precise light-intensity discrimination
- 4096 levels per channel for superior color images
- Tight synchronization with flashlamps, automated filters, shutters, & microscope stages
- Minimizes thermal noise during low-light imaging
- Higher frame rates for precise analysis of rapidly changing specimens
- Increases sensitivity for quantitation & imaging of very low light levels
- Increases frame rate
- Simple connectivity
- Ease of use & installation
- Portability with laptop computer
- Simultaneous use of multiple cameras through a single port
- Single-cable operation (no external power supply or control unit)
- Choose from a large selection of life science & industrial software for microscopy, machine vision, & video-streaming applications

## Binning

## IEEE 1394 FireWire™ QImaging Fast 1394 Technology


## Extensive Third-Party Software Support

# QICAM FAST1394 SPECIFICATIONS

## APPLICATIONS

- Brightfield and Phase-Contrast Microscopy
- Live-Cell Imaging
- Pathology, Histology, & Cytology
- Motility & Motion Analysis
- DNA Analysis
- Metallurgical Microscopy
- Semiconductor Inspection
- Failure Analysis
- Forensic Analysis

## SPECTRAL RESPONSE

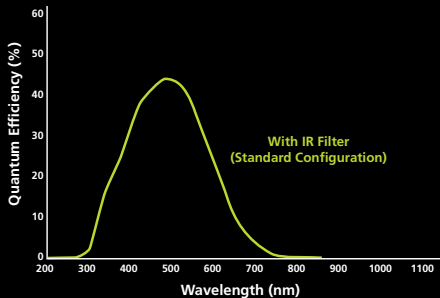

### CCD SENSOR

Light-Sensitive Pixels	1.4 million; 1392 x 1040
Binning Modes	2x2, 4x4, 8x8
ROI (Region of Interest)	From 1x1 pixels up to full resolution, continuously variable in single-pixel increments
Exposure/Integration Control	12µs to 17.9min in 1µs increments
Sensor Type	Sony® ICX205 progressive-scan interline CCD (monochrome or color)
Pixel Size	4.65µm x 4.65µm
Linear Full Well	10,000e <sup>-</sup>
Read Noise	12e <sup>-</sup>
Cooling Available	Yes (optional)
Cooling Type	Peltier thermoelectric cooling to 25°C below ambient
Digital Output	12 bits
Readout Frequency	20, 10, 5, 2.5MHz
Frame Rate	10fps full resolution @ 12 bits (165fps maximum with binning and ROI)

### CAMERA

Computer Platforms/Operating Systems	Windows® & Mac OS**
Digital Interface	IEEE 1394 FireWire™
Sustained Data Rate	40MB/s
Shutter Control	Electronic shutter, no moving parts
External Trigger	TTL Input
Trigger Types	Internal, Software, External
External Sync	TTL Output
Gain Control	0.6 to 15x
Offset Control	-2048 to 2047
Optical Interface	1/2", C-mount optical format
Threadmount	1/4" — 20 mount
Power Requirements	7W (non-cooled); 13W (cooled); 8-24V
Weight	635g (non-cooled); 915g (cooled)
Warranty	2 years
Operating Environment	0 to 50°C (32 to 122°F)
Storage Temperature	-10 to 60°C
Humidity	Less than 80% non-condensing at 35°C (95°F)

\*Refer to QImaging website for detailed listing of supported operating systems.  
 Note: Specifications are nominal and subject to change.

FireWire and Mac OS are trademarks of Apple Computer, Inc., registered in the U.S. and other countries. Sony is a registered trademark of Sony Corporation. Windows is a registered trademark of Microsoft Corporation in the United States and other countries. Other brand and product names are the trademarks or registered trademarks of their respective owners and manufacturers.

**adept**  
**electronic solutions**

The Machine Vision and  
 Imaging Specialists

Perth: +61 (08) 9242 5411  
 Sydney: +61 (02) 9979 2599  
 Melbourne: +61 (03) 9555 5621  
 Email: [adept@adept.net.au](mailto:adept@adept.net.au)  
 Web: <http://www.adept.net.au>



Tel 604.708.5061 ■ Fax 604.539.1825 ■ [info@qimaging.com](mailto:info@qimaging.com)  
[www.qimaging.com](http://www.qimaging.com)