




HIGH PERFORMANCE DIGITAL IMAGING
made easy

RETIGA EXi *FAST1394*

Very High Sensitivity IEEE 1394 FireWire™ Digital CCD Camera – Monochrome or Color

The QImaging Retiga EXi digital camera features enhanced visible and IR quantum efficiency resulting in very high sensitivity that is ideal for demanding low-light and fluorescence imaging applications. A progressive-scan interline CCD sensor gives a resolution of 1.4 million pixels in a 12-bit digital output. High-speed, low-noise electronics provide linear digital data for rapid image capture. The IEEE 1394 FireWire™ digital interface allows ease of use and installation with a single wire. No framegrabber or external power supply is required. The Retiga EXi includes QCapture software (Windows® and Mac OS) for real-time image preview and capture. A **Software Development Kit (SDK)** is available for interfacing with custom software.

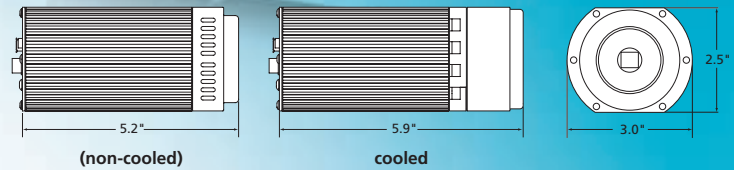

Note: Lenses are shown for illustration only and are not included.

CAMERA MODELS

Includes: IEEE 1394 FireWire™ cable, IEEE 1394 PCI card, QCapture software, & access to SDK

- **Monochrome Retiga EXi Cooled** Model: RET-EXi-F-M-12-C
- **Monochrome Retiga EXi Non-Cooled** Model: RET-EXi-F-M-12
CCD Digital Camera, 12 Bits
- **Color Retiga EXi Cooled** Model: RET-EXi-F-CLR-12-C
- **Color Retiga EXi Non-Cooled** Model: RET-EXi-F-CLR-12
CCD Digital Camera, 12 Bits

CAMERA OPTIONS

- Removable **IR-Cutoff Filter**
- **RGB Color Filter** for monochrome cameras (F-mount interface required), refer to spec sheet for more details
- **Extended Warranty**



FEATURES

- High Quantum Efficiency
- High-Resolution, 1.4-Million-Pixel Sensor
- High-Speed Readout
- Low-Noise Electronics
- Optional/Removable IR-Cutoff Filter
- Flexible Exposure Control from 10µs to 17.9min
- External Sync & Trigger
- Peltier Cooling
- Binning
- Extended IR Sensitivity
- IEEE 1394 FireWire™ QImaging Fast 1394 Technology
- Extensive Application Software Support

BENEFITS


- Very high sensitivity for demanding low-light & fluorescent imaging
- Highly detailed, sharp images
- Previewing & focusing in real time
- 110fps with 8x8 binning & ROI
- 10fps full resolution @ 12 bits
- Ideal for automated imaging applications
- Quantitation & imaging of low light levels
- Highly focused visible-range images with IR filter in place
- Removable for IR applications
- Optimal integration over a wide range of light levels
- Tight synchronization with flashlamps, automated filters, shutters, & microscope stages
- Minimizes thermal noise during low-light, long-exposure imaging
- Increases sensitivity for quantitation & imaging of very low light levels
- Increases frame rate
- High-performance imaging outside the visible range
- Simple connectivity
- Ease of use & installation
- Portability with laptop computer
- Simultaneous use of multiple cameras through a single port
- Single-cable operation (no external power supply or control unit)
- Choose from a large selection of life science & industrial software for microscopy, machine vision, & video-streaming functions

RETIGA EXi FAST1394 SPECIFICATIONS

APPLICATIONS

- Brightfield, Phase-Contrast, & Darkfield Microscopy
- Fluorescence Microscopy
- Live-Cell Imaging
- Pathology, Histology, & Cytology
- Green Fluorescent Protein (GFP) Applications
- FISH
- Ca⁺⁺ Ratio Analysis
- Motility & Motion Analysis
- DNA Analysis
- Metallurgical Microscopy
- Semiconductor Inspection
- Manufacturing Quality Control
- Failure Analysis
- Forensic Analysis

SPECTRAL RESPONSE

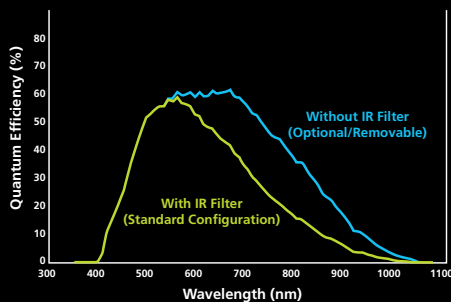

**adept
electronic solutions**

**The Machine Vision and
Imaging Specialists**

Perth: +61 (08) 9242 5411
 Sydney: +61 (02) 9979 2599
 Melbourne: +61 (03) 9555 5621
 Email: adept@adept.net.au
 Web: <http://www.adept.net.au>

CCD SENSOR

Light-Sensitive Pixels	1.4 million; 1392 x 1040
Binning Modes	2x2, 4x4, 8x8
ROI (Region of Interest)	From 1x1 pixels up to full resolution, continuously variable in single-pixel increments
Exposure/Integration Control	10µs to 17.9min in 1µs increments
Sensor Type	Sony® ICX285 progressive-scan interline CCD (monochrome or color)
Pixel Size	6.45µm x 6.45µm
Linear Full Well	18,000e ⁻ (22,000e ⁻ with 2x2 binning)
Read Noise	8e ⁻
Dark Current	0.15e ⁻ /pix/s (cooled)
Cooling Available	Yes (optional)
Cooling Type	Peltier thermoelectric cooling to 25°C below ambient
Digital Output	12 bits
Readout Frequency	20, 10, 5, 2.5MHz
Frame Rate	10fps full resolution @ 12 bits (165fps maximum with binning and ROI functions)

CAMERA

Computer Platforms/Operating Systems	Windows® & Mac OS*
Digital Interface	IEEE 1394 FireWire™
Sustained Image Data Rate	40MB/s
External Trigger	TTL Input (optically coupled)
Trigger Types	Internal, Software, External
External Sync	TTL Output (optically coupled)
Gain Control	0.7 to 30x
Offset Control	-2048 to 2047
Optical Interface	2/3", C-mount optical format
Threadmount	1/4" – 20 mount
Power Requirements	7W (non-cooled); 13W (cooled); 8-24V
Weight	640g (non-cooled); 920g (cooled)
Warranty	2 years
Operating Environment	0 to 50°C (32 to 122°F)
Storage Temperature	-10 to 60°C
Humidity	Less than 80% non-condensing at 35°C (95°F)

*Refer to Qimaging website for detailed listing of supported operating systems.
 Note: Specifications are nominal and subject to change.

FireWire and Mac OS are trademarks of Apple Computer, Inc., registered in the U.S. and other countries. Sony is a registered trademark of Sony Corporation. Windows is a registered trademark of Microsoft Corporation in the United States and other countries. Other brand and product names are the trademarks or registered trademarks of their respective owners and manufacturers.



Tel 604.708.5061 ▪ Fax 604.539.1825 ▪ info@qimaging.com
www.qimaging.com