Xenon-Sapphire 3.2/88 with BS

This lens with beam splitter for axial illumination is optimized for 16k / 3.5 µm (57.3 mm) or 5 µm (up to 82 mm) line scan sensors or can be used with area scan cameras. It provides high performance at 100 LP/mm and detects the smallest targets to solve the most challenging applications. The V-Mount interface makes it easy to install mounts and to rotate the lens into the highest performance.

Key features

- For 16k / 3.5 µm (57.3 mm) or 16k / 5 µm (82 mm) line scan sensors
- With beam splitter for axial in-line illumination
- 400 nm to 1000 nm broadband AR-coating
- Lockable distance and aperture settings

Applications

- FPD inspection
- PCB inspection
- High resolution defect detection
- Quality assurance systems

Technical specifications

Type	-0003
ID	1073347
Interface	V70-Mount
Focal length [mm]	88
F/# range	F/3.2 ... F/8
Numerical aperture	0.05
Max. sensor size [mm]	82
Max. angle of view [°]	20
Rec. magnification range	-1.75 (-1.85 ... -1.65)
Rec. working distance range [mm]	59 ... 64
Max. mechanical focus travel [mm]	24
Filter thread [mm]	-
Storage temperature [°C]	-25 … +70
Net. weight [g]	935
Additional info	Chief ray angle in object space = 10.2°
f'eff [mm]	88.22
SF [mm]	-11.97
S'F' [mm]	56.80
HH' [mm]	-0.80
ß'P	1.10
SEP [mm]	68.50
S'AP [mm]	-39.92
Σd [mm]	106.87

© Jos. Schneider Optische Werke
We accept no responsibility for an

ADEPT TURNKEY
SMARTER IMAGING FOR BETTER LIVES
Perth: (08) 9242 5411 Melbourne: (03) 9384 1775 Sydney: (02) 9905 1551
Email: sales@adeptturnkey.com.au
Web site: www.adept.net.au

Xenon-Sapphire 3.2/88 with BS

MTF charts

Spectrum name	VIS					
Wavelengths [nm]	425	475	525	575	625	675
Rel. weights [%]	8	16	23	22	19	13

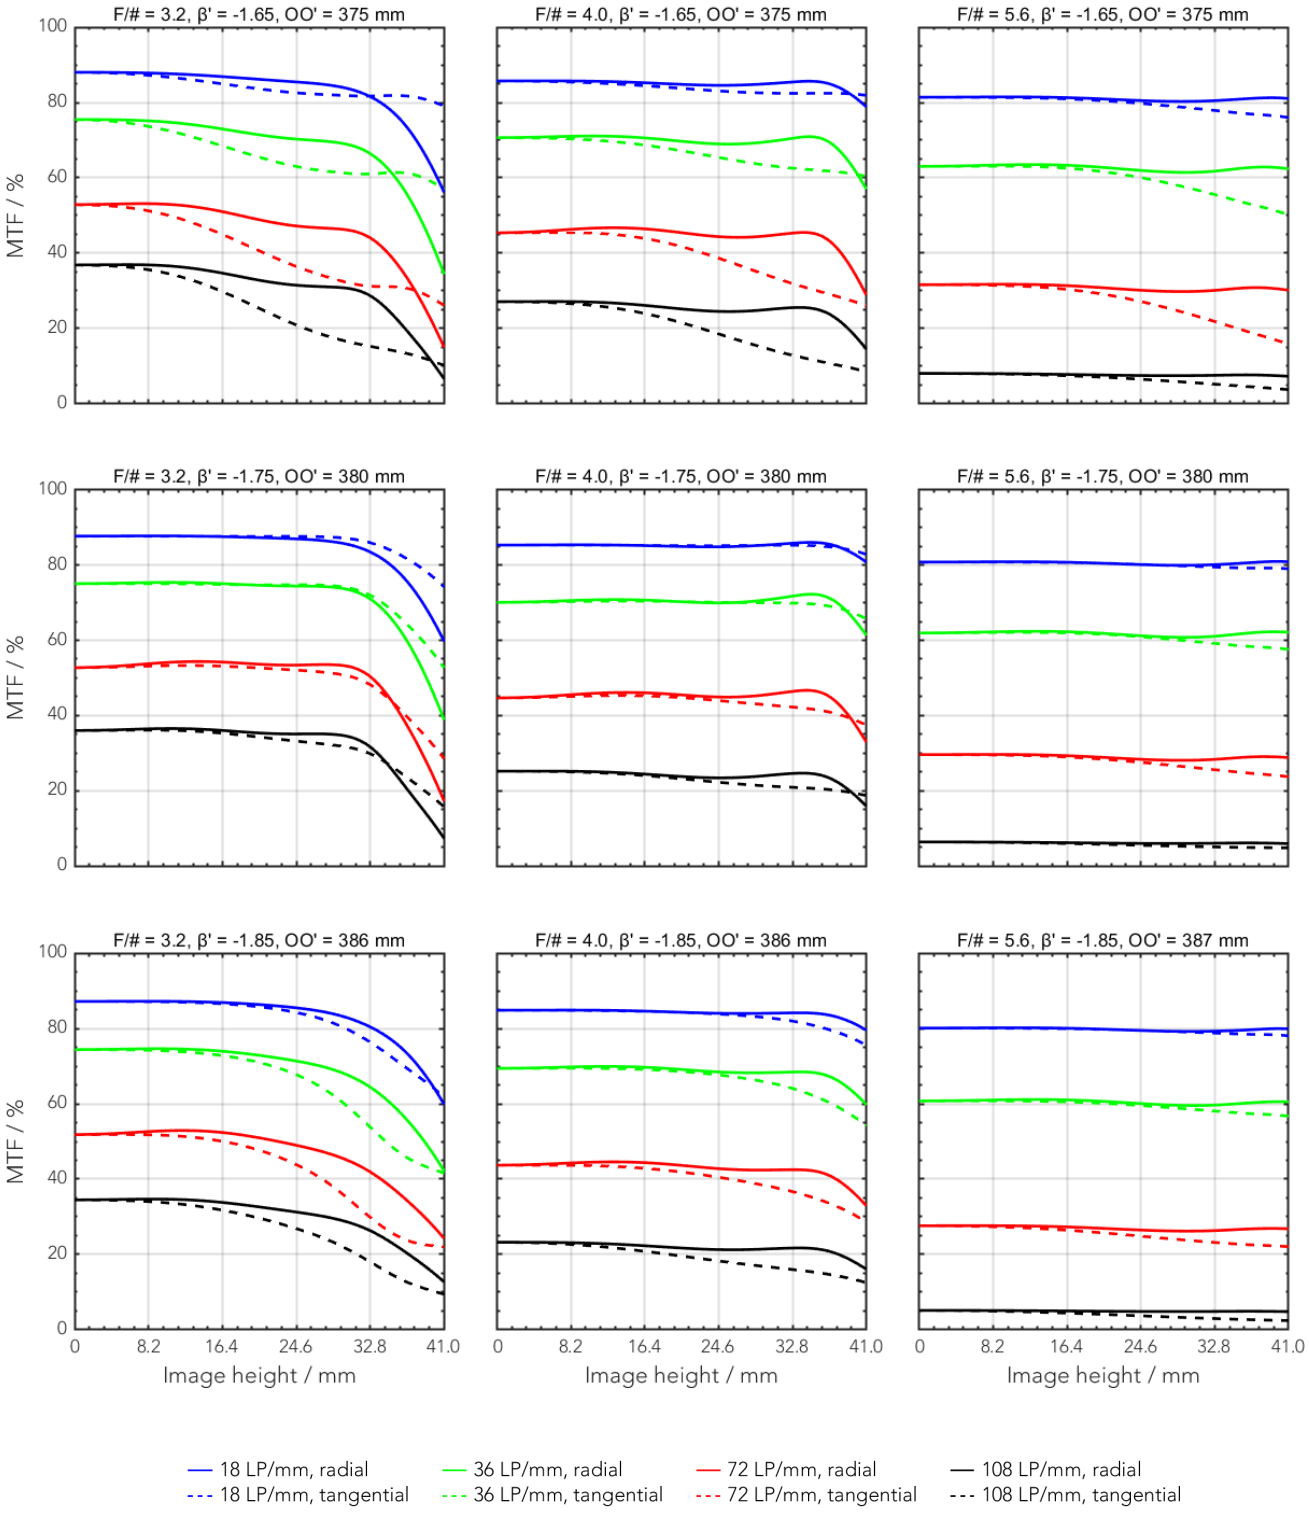

© Jos. Schneider Optische Werke GmbH | 3/2020 | Jos. Schneider Optische Werke GmbH is certified ISO 9001.
We accept no responsibility for any errors and reserve the right of modification without further notice.

Xenon-Sapphire 3.2/88 with BS

Rel. illumination vs. image height

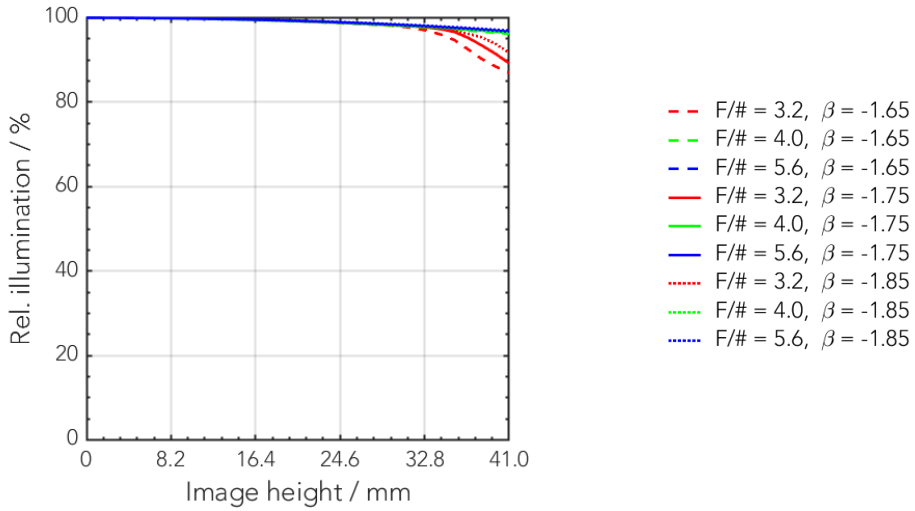

Distortion vs. image height

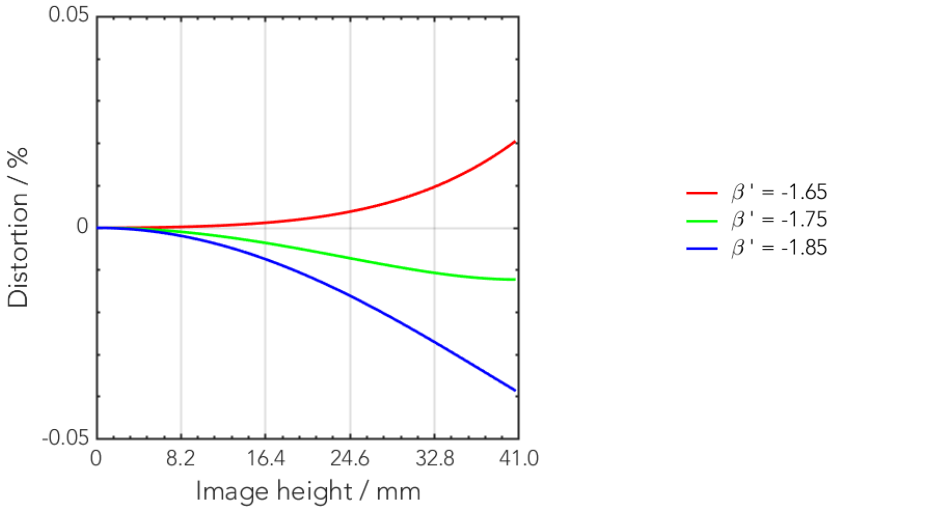

Transmittance vs. wavelength

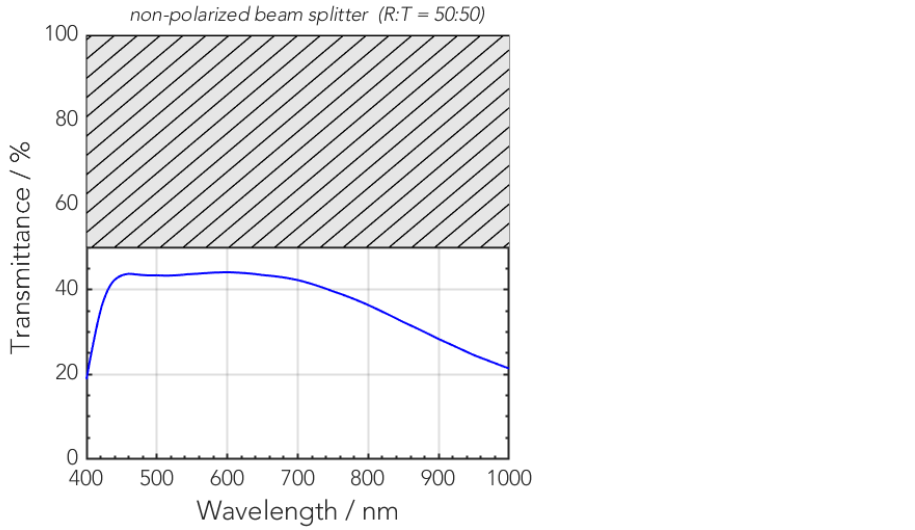

© Jos. Schneider Optische Werke GmbH | 3/2020 | Jos. Schneider Optische Werke GmbH is certified ISO 9001.
We accept no responsibility for any errors and reserve the right of modification without further notice.

Technical drawings

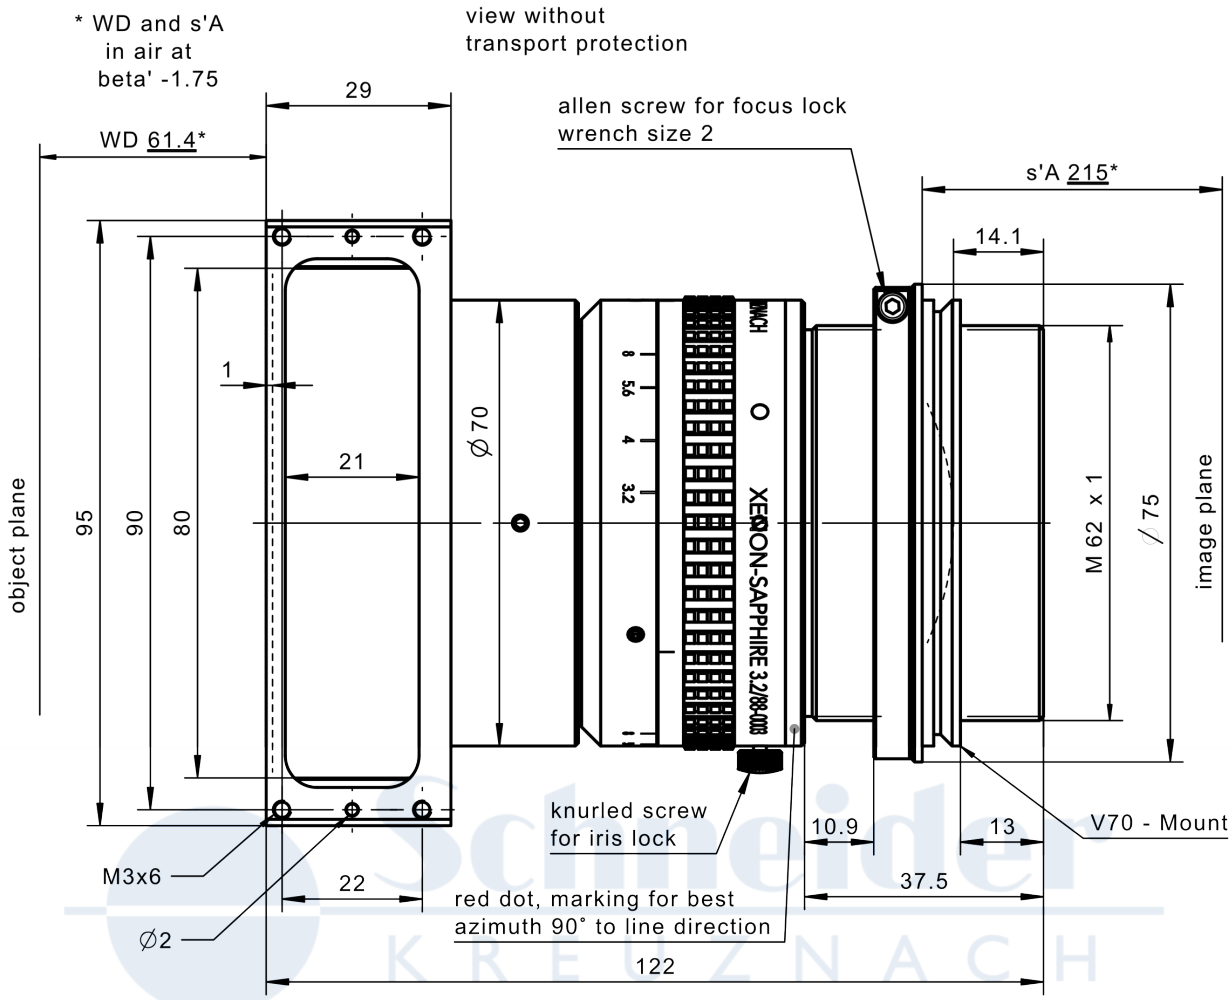

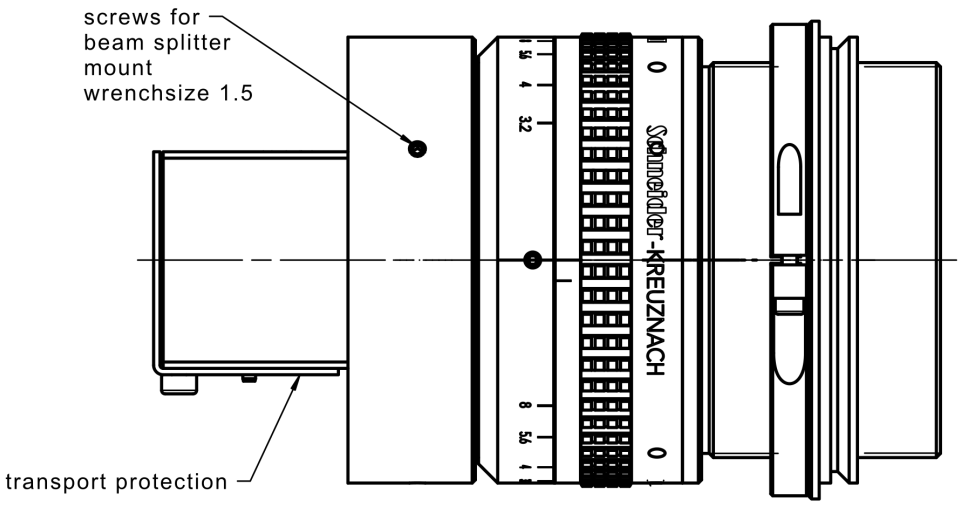

standard

© Jos. Schneider Optische Werke GmbH | 3/2020 | Jos. Schneider Optische Werke GmbH is certified ISO 9001.
We accept no responsibility for any errors and reserve the right of modification without further notice.

Xenon-Sapphire 3.2/88 with BS

Accessories	Mount	Eff. length	ID
Adapter	V70 / M72 x 0.75	10 mm	1072419
Extension tube	M72 x 0.75 / M72 x 0.75	5 mm	1072420
	M72 x 0.75 / M72 x 0.75	10 mm	1072421
	M72 x 0.75 / M72 x 0.75	25 mm	26406
	M72 x 0.75 / M72 x 0.75	50 mm	1054733

© Jos. Schneider Optische Werke GmbH | 3/2020 | Jos. Schneider Optische Werke GmbH is certified ISO 9001.
We accept no responsibility for any errors and reserve the right of modification without further notice.

Annotation	
Focal length	Nominal focal length
F/# range	Image space F-number range for infinity focus position
Numerical aperture	Maximum real numerical aperture (depending on recommended magnification range either for infinity or respective fixed magnification)
Max. sensor size	Image circle diameter
Max. angle of view	Angle of view associated with maximum sensor size (depending on recommended magnification range either for infinity or respective fixed magnification)
Rec. magnification range	Magnification range as recommended by Schneider-Kreuznach
Rec. working distance range	Working distance, i.e. distance between object and first mechanical element, associated with recommended magnification range
Max. mechanical focus travel	Maximum possible movement of the lens from infinity position (depending on recommended magnification range either for infinity or respective fixed magnification)
Net weight	weight of unpacked lens without lens cap
f'eff	Effective focal length
SF	Distance between vertex of first lens surface and object space focal point
S'F'	Distance between vertex of last lens surface and image space focal point (back focal distance at infinity)
HH'	Distance between principal planes
ß'P	Pupil magnification (= exit pupil diameter / entrance pupil diameter)
SEP	Distance between vertex of first lens surface and entrance pupil
S'AP	Distance between vertex of last lens surface and exit pupil
Σ d	Distance between vertices of first and last lens surface
s'A	Flange focal distance (in air) for infinite object distance (depending on recommended magnification range either for infinity or respective fixed magnification)
ß'	Magnification (= image size / object size), negative value because image is inverted
OO'	Distance between object and image

Unless otherwise stated all dimensions in this data sheet are in mm.

© Jos. Schneider Optische Werke GmbH | 3/2020 | Jos. Schneider Optische Werke GmbH is certified ISO 9001.
We accept no responsibility for any errors and reserve the right of modification without further notice.

Headquarters Europe

Jos. Schneider Optische Werke GmbH
Ringstraße 132
55543 Bad Kreuznach
✆ +49 671 601 205
✉ cs@schneiderkreuznach.com
www.schneiderkreuznach.com

Offices Worldwide

America
✆ +1 800 645 7239 (East Coast)
✆ +1 800 228 1254 (West Coast)
✉ info@schneideroptics.com

Asia
✆ +86 755 8832 1170
✉ info@schneider-asiapacific.com

ADEPT TURNKEY
SMARTER IMAGING FOR BETTER LIVES
Perth: (08) 9242 5411 **Melbourne:** (03) 9384 1775 **Sydney: (02)** 9905 1551
Email: sales@adeptturnkey.com.au
Web site: www.adept.net.au

© Jos. Schneider Optische Werke GmbH | 3/2020 | Jos. Schneider Optische Werke GmbH is certified ISO 9001.
We accept no responsibility for any errors and reserve the right of modification without further notice.