# Xenon-Emerald 2.9/100 L | V48

This large format lens comes with a V48-Mount for more flexibility. Optimized for longer distances up to infinity. The low field of curvature makes the lens the ideal choice where a compact lens inquires large field of view. These robust lenses are ideal for factory automation as well as for scanning applications. We also offer a version optimized for close-up applications.

## Key features

- V48-Mount
- 43.2 mm image circle
- optimized for long working distances
- 400-1000 nm broadband AR-coating

## Applications

- Quality control
- Code reader
- Web inspection
- Factory automation

## Technical specifications

| | |
|---|---|
| Type [standard] | -0003 |
| ID [standard] | 1073834 |
| Interface | V48-Mount |
| Focal length [mm] | 100 |
| F/# range | F/2.9 ... F/22 |
| Numerical aperture | 0.17 |
| Max. sensor size [mm] | 43.2 |
| Max. angle of view [°] | 24 |
| Rec. magnification range | -0.1 ... 0 |
| Rec. working distance range [mm] | 1051 ... ∞ |
| Max. mechanical focus travel [mm] | - |
| Filter thread [mm] | M43 x 0.75 |
| Storage temperature [°C] | -25 … +70 |
| Net. weight [g] | 381 |
| Additional info | - |
| f'eff [mm] | 100.93 |
| SF [mm] | -46.36 |
| S'F' [mm] | 78.74 |
| HH' [mm] | -17.32 |
| ß'P | 1.32 |
| SEP [mm] | 30.23 |
| S'AP [mm] | -54.25 |
| Σd [mm] | 59.43 |

© Jos. Schneider Optische Werke
We accept no responsibility for an

ADEPT TURNKEY
SMARTER IMAGING FOR BETTER LIVES
Perth: (08) 9242 5411 Melbourne: (03) 9384 1775 Sydney: (02) 9905 1551
Email: sales@adeptturnkey.com.au
Web site: www.adept.net.au

# Xenon-Emerald 2.9/100 L | V48

## MTF charts

| Spectrum name | VIS | | | | | |
|---|---|---|---|---|---|---|
| Wavelengths [nm] | 425 | 475 | 525 | 575 | 625 | 675 |
| Rel. weights [%] | 8 | 16 | 23 | 22 | 19 | 13 |




© Jos. Schneider Optische Werke GmbH | 1/2021 | Jos. Schneider Optische Werke GmbH is certified ISO 9001.
We accept no responsibility for any errors and reserve the right of modification without further notice.

# Xenon-Emerald 2.9/100 L | V48

## Rel. illumination vs. image height

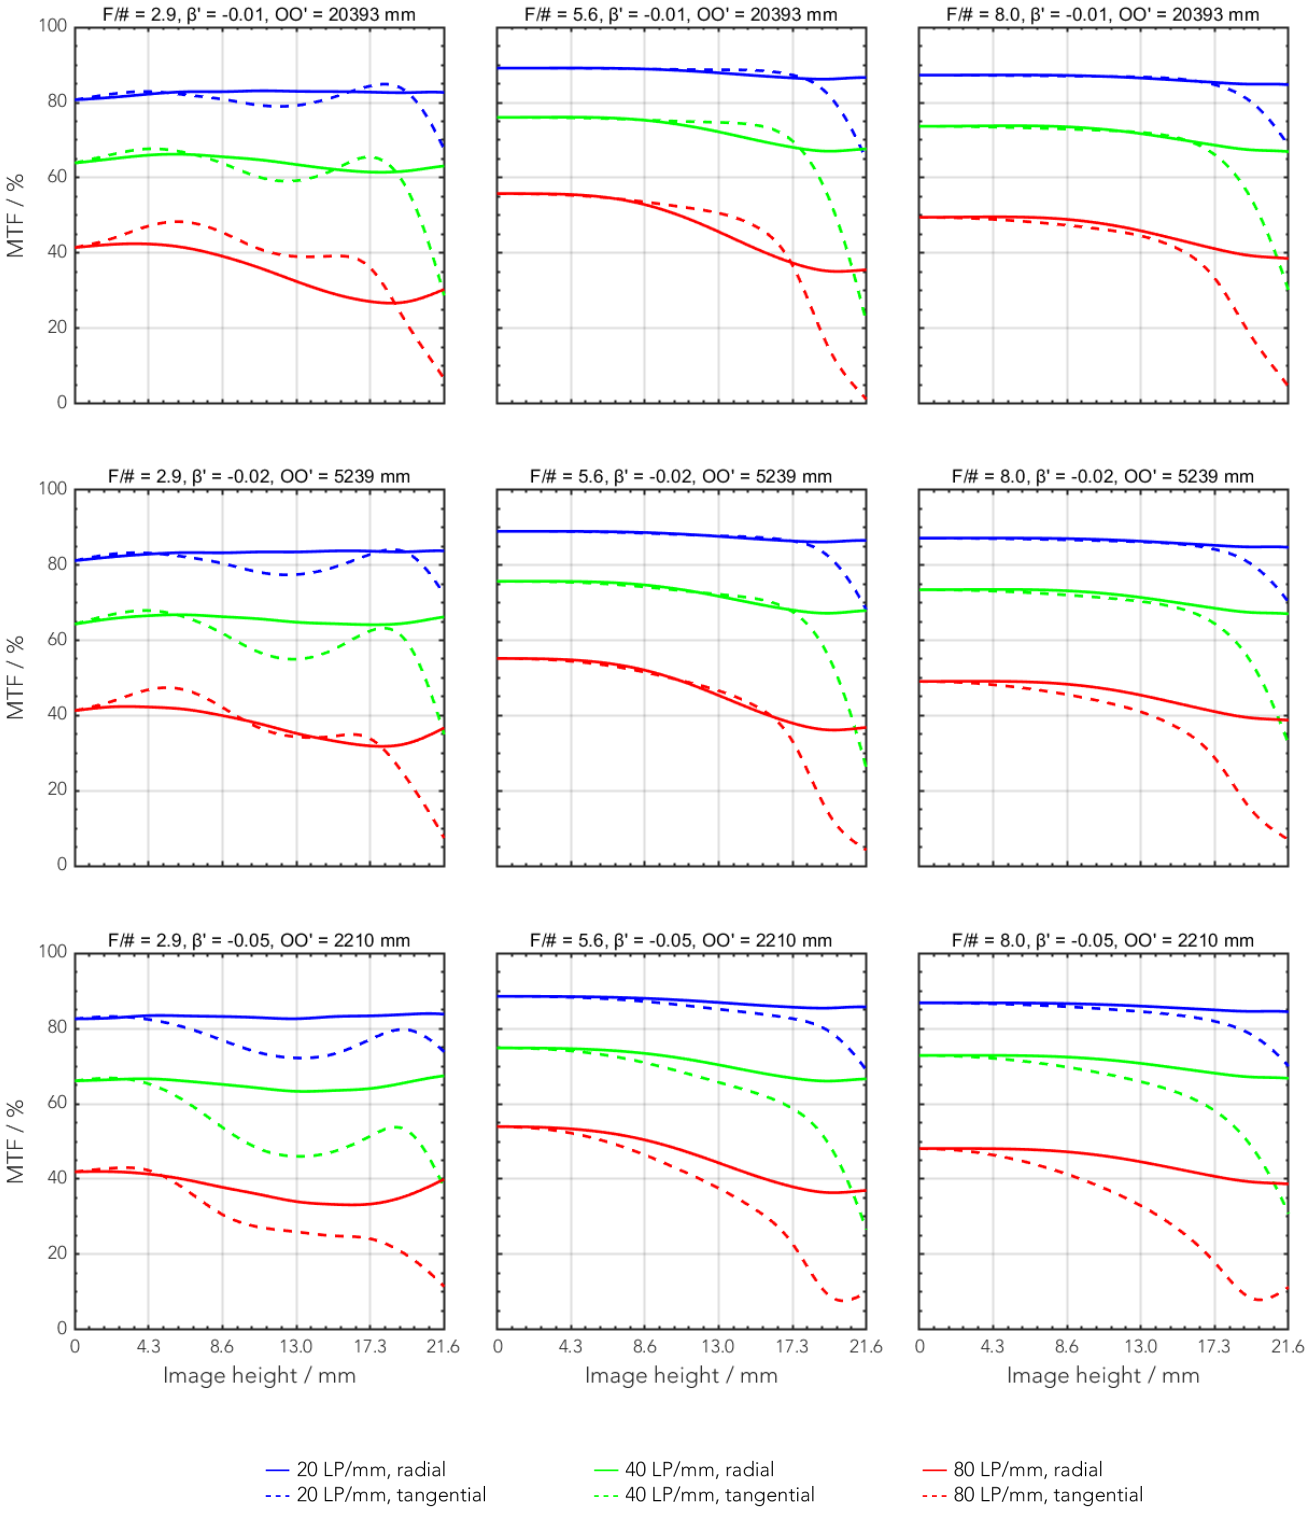


## Distortion vs. image height




## Transmittance vs. wavelength

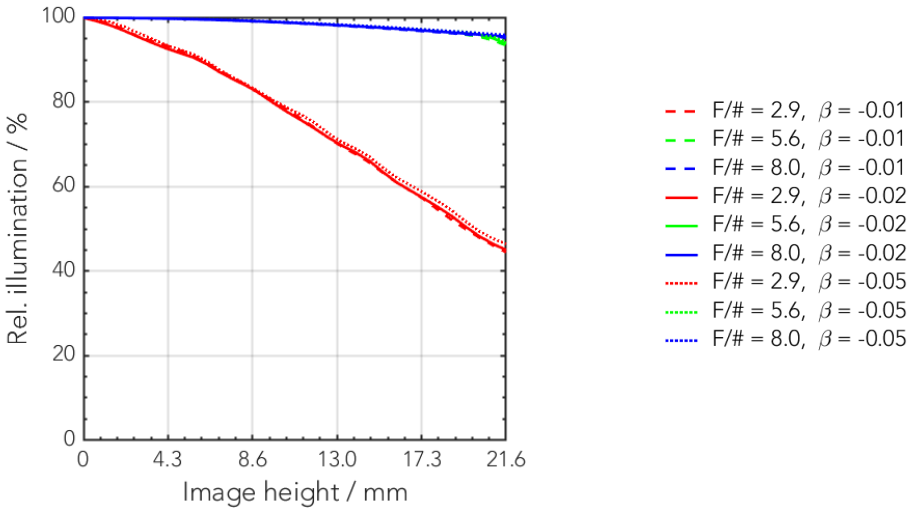


© Jos. Schneider Optische Werke GmbH | 1/2021 | Jos. Schneider Optische Werke GmbH is certified ISO 9001.
We accept no responsibility for any errors and reserve the right of modification without further notice.

## Technical drawings

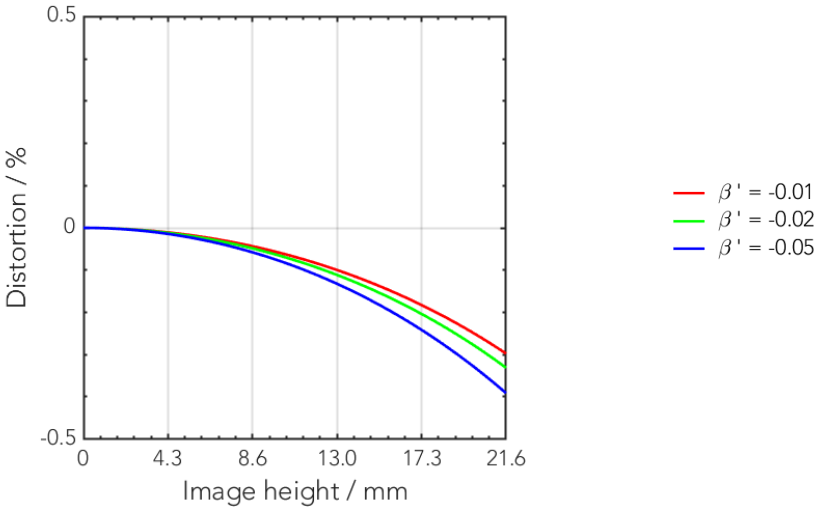


standard

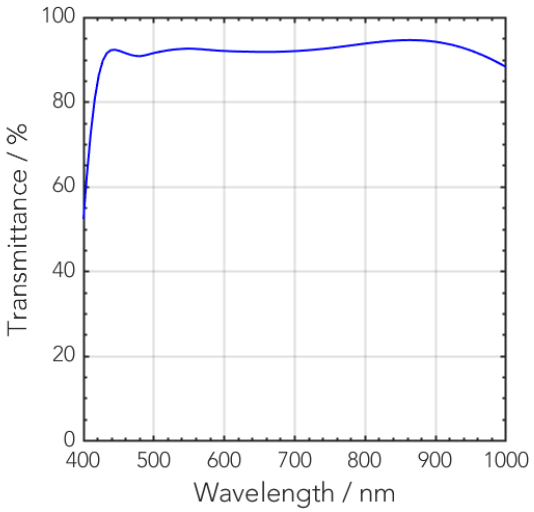© Jos. Schneider Optische Werke GmbH | 1/2021 | Jos. Schneider Optische Werke GmbH is certified ISO 9001.
We accept no responsibility for any errors and reserve the right of modification without further notice.

# Xenon-Emerald 2.9/100 L | V48

| Accessories | Mount | Eff. length | ID |
|---|---|---|---|
| Adapter | V48 / C-Mount | 8.5 mm | 1072650 |
| | V48 / TFL-Mount | 8.5 mm | 1098492 |
| | V48 / M42 x 0.75 | 8.5 mm | 1072652 |
| | V48 / M42 x 1 | 8.5 mm | 1072660 |
| | V48 / M58 x 0.75 | 10 mm | 1072659 |
| Extension tube | V48 / V48 | 10 mm | 1072661 |
| | V48 / V48 | 25 mm | 1072651 |
| | V48 / V48 | 50 mm | 1072662 |

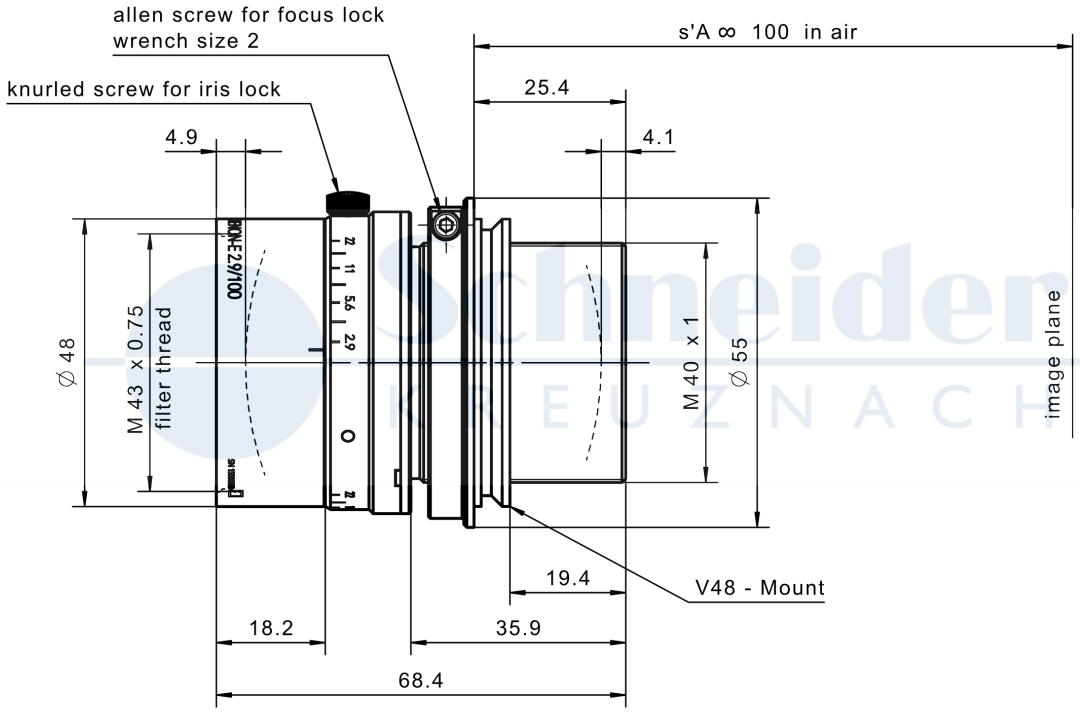© Jos. Schneider Optische Werke GmbH | 1/2021 | Jos. Schneider Optische Werke GmbH is certified ISO 9001.
We accept no responsibility for any errors and reserve the right of modification without further notice.

| Annotation | |
|---|---|
| Focal length | Nominal focal length |
| F/# range | Image space F-number range for infinity focus position |
| Numerical aperture | Maximum real numerical aperture (depending on recommended magnification range either for infinity or respective fixed magnification) |
| Max. sensor size | Image circle diameter |
| Max. angle of view | Angle of view associated with maximum sensor size (depending on recommended magnification range either for infinity or respective fixed magnification) |
| Rec. magnification range | Magnification range as recommended by Schneider-Kreuznach |
| Rec. working distance range | Working distance, i.e. distance between object and first mechanical element, associated with recommended magnification range |
| Max. mechanical focus travel | Maximum possible movement of the lens from infinity position (depending on recommended magnification range either for infinity or respective fixed magnification) |
| Net weight | weight of unpacked lens without lens cap |
| f'eff | Effective focal length |
| SF | Distance between vertex of first lens surface and object space focal point |
| S'F' | Distance between vertex of last lens surface and image space focal point (back focal distance at infinity) |
| HH' | Distance between principal planes |
| ß'P | Pupil magnification (= exit pupil diameter / entrance pupil diameter) |
| SEP | Distance between vertex of first lens surface and entrance pupil |
| S'AP | Distance between vertex of last lens surface and exit pupil |
| Σ d | Distance between vertices of first and last lens surface |
| s'A | Flange focal distance (in air) for infinite object distance (depending on recommended magnification range either for infinity or respective fixed magnification) |
| ß' | Magnification (= image size / object size), negative value because image is inverted |
| OO' | Distance between object and image |

Unless otherwise stated all dimensions in this data sheet are in mm.

© Jos. Schneider Optische Werke GmbH | 1/2021 | Jos. Schneider Optische Werke GmbH is certified ISO 9001.
We accept no responsibility for any errors and reserve the right of modification without further notice.

## Headquarters Europe

**Jos. Schneider Optische Werke GmbH**
Ringstraße 132
55543 Bad Kreuznach
✆ +49 671 601 205
✉ cs@schneiderkreuznach.com
www.schneiderkreuznach.com

## Offices Worldwide

**America**
✆ +1 800 645 7239 (East Coast)
✆ +1 800 228 1254 (West Coast)
✉ info@schneideroptics.com

**Asia**
✆ +86 755 8832 1170
✉ info@schneider-asiapacific.com

ADEPT TURNKEY
SMARTER IMAGING FOR BETTER LIVES
**Perth:** (08) 9242 5411 **Melbourne:** (03) 9384 1775 **Sydney: (02)** 9905 1551
**Email**: sales@adeptturnkey.com.au
**Web site**: www.adept.net.au

© Jos. Schneider Optische Werke GmbH | 1/2021 | Jos. Schneider Optische Werke GmbH is certified ISO 9001.
We accept no responsibility for any errors and reserve the right of modification without further notice.